

Technical Moment

ARTICLE



FÁBRICA CARIOCA
DE CATALISADORES

DENALI: a new catalysts platform for maximum bottoms conversion

Renato Necco Castro

Technical Consultant
CENPES/PDIDMS/PRGN/GPF

Lilian Rodrigues Canabarro

Process Engineer
CENPES/PDIDMS/PRGN/GPF

Marlon Brando Bezerra de Almeida

Senior Technical Consultant
CENPES/PDIDMS/PRGN/GPF

Allan Silvestre Knapik

Process Engineer
CENPES/PDIDMS/PRGN/GPF

The DENALI catalysts, manufactured by the new GRANITETM technology, represent the newest products family developed under the technological partnership between ALBEMARLE, FCC SA and PETROBRAS. The DENALI catalysts family results from several years of activities in several R&D projects to reach the goal of same TOPAZ products bottoms conversion with advantage in coke selectivity.

The DENALI catalysts exhibit two features that differ from the TOPAZ catalysts:


- a. **New binding matrix;**
- b. **New ultra-stabilized Y zeolite technology.**

The new ADMTM-85 binding matrix was introduced to optimize the pore distribution in the catalyst and improve the Y zeolite acidic sites stability when the product is submitted to the typical conditions of the FCC unit regenerator. Besides the features cited above, the new matrix further provides additional binding capacity, securing the catalyst particle higher mechanical resistance, which can be used to increase the active ingredients content and further improve the performance.

MARCH
2023

The new technology for zeolite Y ultra-stabilization was developed for this ingredient to modify the cracking products profile with significant coke yield reduction. The new **ADZTTM-600** zeolite developed with the aid of this technology is produced under specific operating conditions to secure improved stability and micropores retention, providing equilibrium between activity and hydrogen transfer. In this way, the active sites of this kind of zeolite are optimized, favoring the lower coke yield. Besides, the new zeolite exhibits relevant differences in terms of pore distribution relative to the conventional zeolite (**Figure 1**), providing easier access to the acidic sites.

Figure 1 – Conventional zeolite pore size distribution and ADZTTM-600.

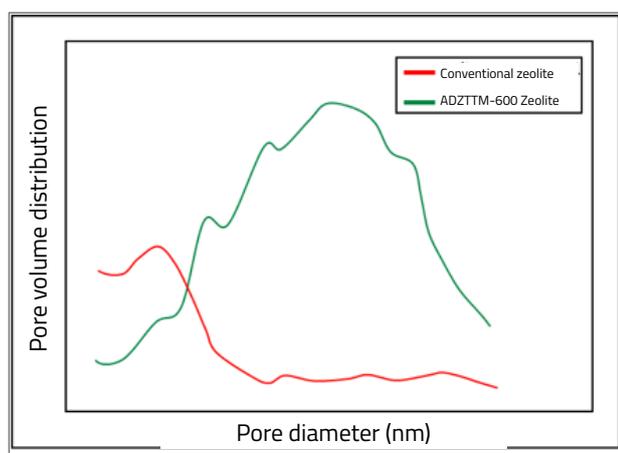

Aiming at completing the development cycle of the new **DENALI** catalysts technology, a domestic feed commercial sample of the product was submitted to performance tests at the **PETROBRAS CENPES R&D Center** in lab scale and pilot plant scale for direct comparison with the **TOPAZ** catalysts consumed in the **PETROBRAS** refineries. The **TOPAZ** catalysts have been successfully employed to maximize conversion by means of reduced bottoms product yield. However, a high accessibility catalyst systems improvement opportunity has been observed, with better coke selectivity, enabling to reach the maximum profitability potential.

Table 1 lists the textural properties of virgin catalysts and after the metal impregnation and deactivation steps in fluidized bed units. Relative to the **TOPAZ** catalysts, represented in this comparison by the **UPGRADER**, **ZIRCON** and **OPAL SC LRT** catalysts, the **DENALI** catalyst exhibited advantages related to micropores retention volume (MiPV). Such property is directly related to the zeolite catalyst area, which pointed out that the new **ADMTM-85** matrix, associated with **ADZTTM-600** zeolite imparts higher protection to the active sites of the zeolite, the main catalyst component.

Table 1 – Textural Properties before and after deactivation in the presence of contaminating metals.

SAMPLE		DENALI	UPGRADER	ZIRCON	OPAL SC LRT
VIRGIN	BET A.E. (m ² /g)	246	277	299	285
	MiPV (cm ³ /g)	0.046	0.060	0.070	0.066
	MSA (m ² /g)	146	150	150	145
IMPREGNATION	Ni (ppm)	909	899	871	1009
	V (ppm)	1135	1071	1033	1092
DEACTIVATION	BET A.E. (m ² /g)	140	145	149	146
	MiPV (cm ³ /g)	0.019	0.014	0.019	0.016
	MSA (m ² /g)	99	115	108	111
RETENTION	BET A. E. (Ret%)	57	52	50	51
	MiPV (Ret%)	40	23	27	25
	MSA (Ret%)	68	77	72	76

Where:

- BET S.A. = Specific area assessed by the BET method
- MiPV = Micropore Volume
- MSA = External area or Mesopore surface area

Figures 2 and 3 illustrate the results for coke and clarified oil yield (**CLAO**), this being the bottoms product of the commercial cracking unit (**FCCU**) for the tests in laboratory cracking unit (**ACE**), while **Figures 4 and 5** relate to products yields obtained in a pilot scale cracking unit (DCR). Performance data analysis, both in lab scale and pilot plant scale were fully favorable to the **DENALI** catalyst, demonstrating the expected improvement in coke selectivity related to all the tested **TOPAZ** technology products, with bottoms conversion (as represented by the yield in **CLAO**) at least similar, resulting in higher bottoms conversion at constant coke yield (**Figure 6**). A further advantage of the **DENALI** catalyst observed in the pilot plant scale test was the higher **cracked Naphtha** octane (**Figure 7**).

Figure 2 – Coke yield at constant conversion at the ACE unit.

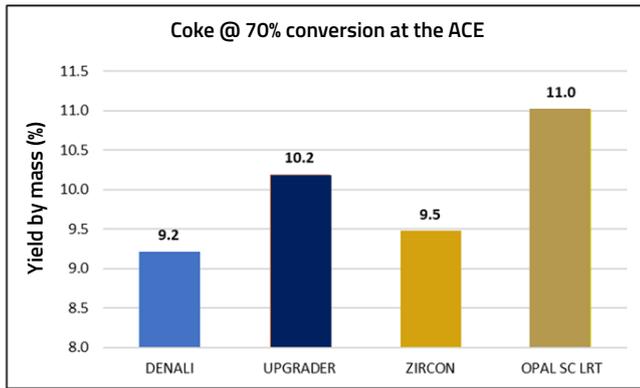


Figure 5 – Yield in clarified oil at constant conversion at the pilot unit.

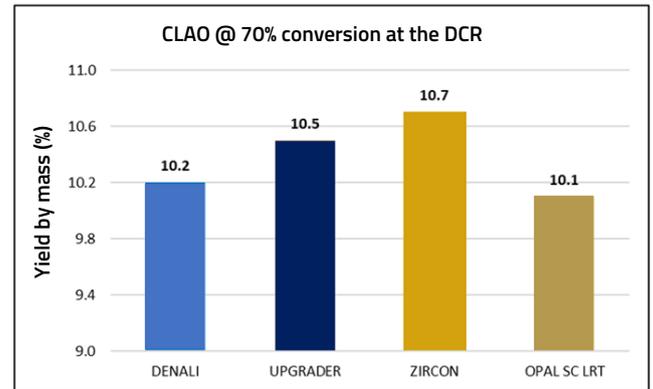


Figure 3 – Yield in clarified oil at constant conversion at the ACE unit.

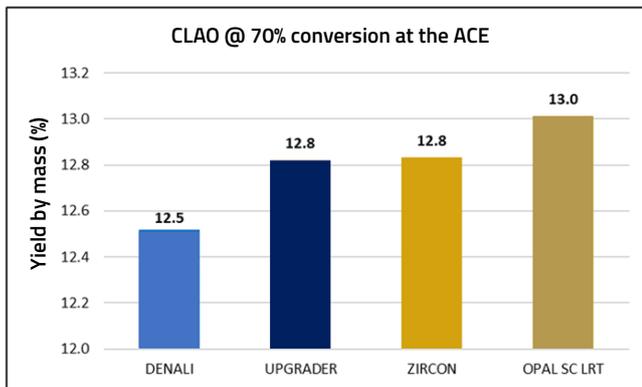


Figure 6 – Yield in clarified oil at constant coke at the pilot unit.

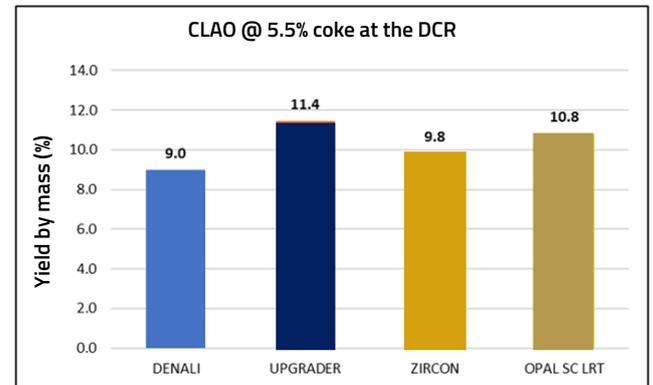


Figure 4 – Coke yield at constant conversion at pilot unit.


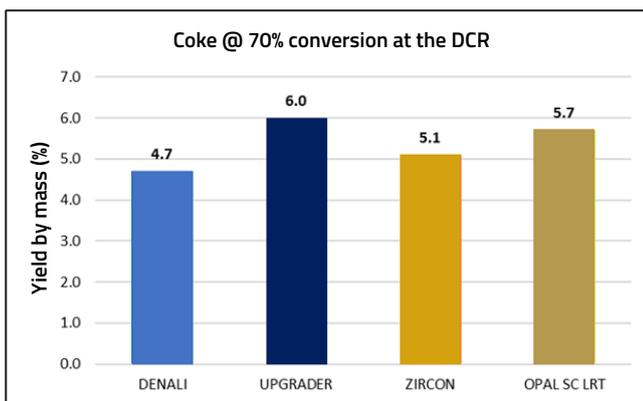


Figure 7 – Cracked naphtha motor octane number.

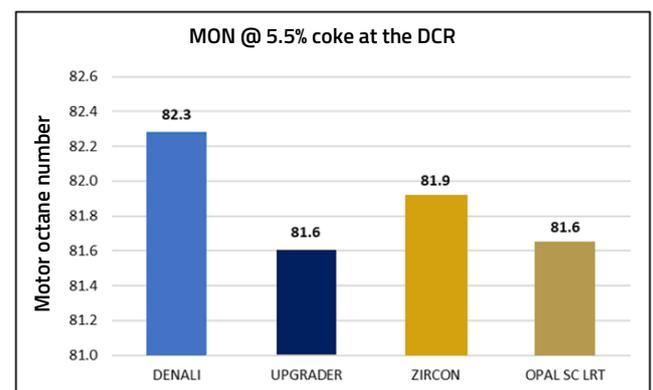


Based on these results the **DENALI** catalyst technology (with the same formulation as that tested at **PETROBRAS CENPES R&D Center**) was approved for a commercial test in a **PETROBRAS** gasoil cracking unit, since a relevant improved performance opportunity was spotted for this unit through the utilization of a better coke selectivity catalyst system.

After planning detailed by the **PETROBRAS CENPES R&D Center** and FCC S.A., the **DENALI** catalyst industrial production for refinery supply was obtained in March 2021. The **DENALI** product met all the established specifications and the lab scale performance analysis demonstrated that the results exhibited by the catalyst manufactured at FCC S.A. were similar to those obtained in the test period.

The new catalyst system with the **DENALI** catalyst (**DENALI K 5005**) replaced the **OPAL K 2181**, as demonstrated below:

Figure 8 – Recent reformulations at a PETROBRAS FCCU.

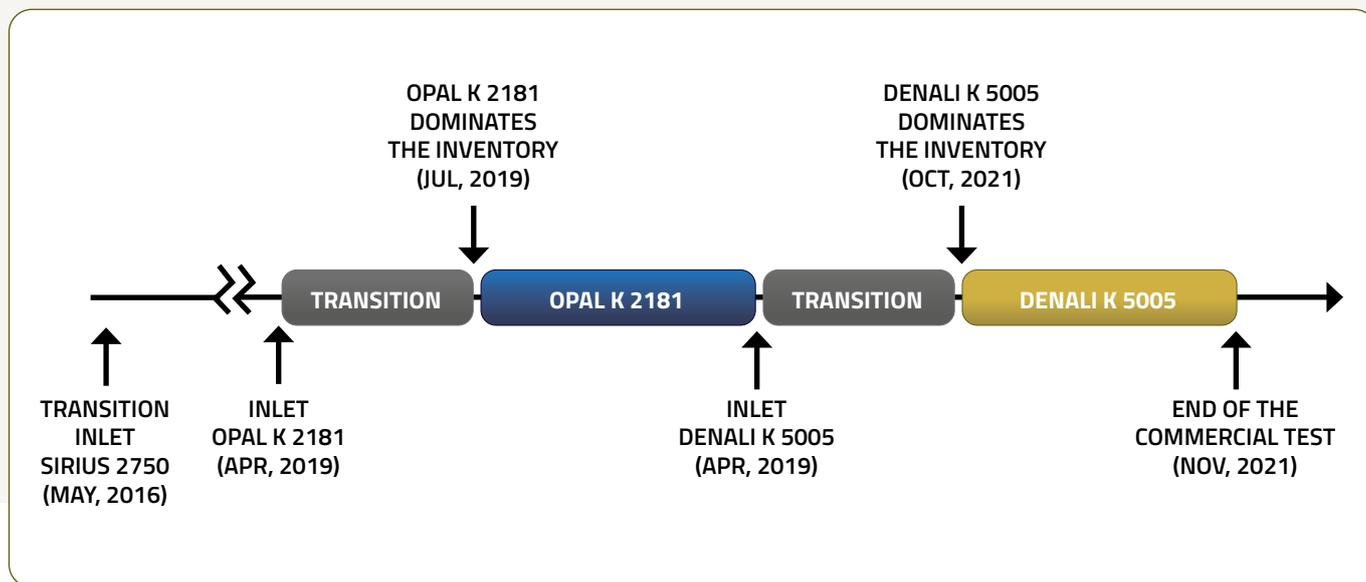

The **DENALI** catalyst replaced the **UPGRADER** catalyst, which represented nearly 50% of the inventory in the **OPAL K2181** system. The amounts of the remaining components relative to the previous catalyst system were kept as such. The new **DENALI K5005** system was forwarded to the refinery on May 19, 2021, being added definitively to the FCC unit in June and started to dominate the unit inventory on October 4th, 2021 (75% exchange).

Different statistical techniques such as Clusters analysis and Neural Networks modelling were used to determine the new catalyst system performance analysis. Besides, a test was performed under pre-set operating conditions in order to allow direct comparison with the previous catalyst system domination period.

During the statistical evaluation by forming groupings, unit data for formation of two Clusters were used. Both Clusters exhibited some independent variable having deviation higher than that set forth in the **PETROBRAS** catalysts commercial

analysis standards. The main differences were total feed flow rate, coke heavy gas oil flow rate (**GOPK**) and Vanadium content in the equilibrium catalysts (e-cats). Generally, both Clusters showed similar results by comparing the **DENALI** catalyst-containing catalyst system with the previous catalyst system: reduction in the regenerator dense phase temperature (**DPT**); increased bottoms conversion directed to higher **LPG** yield (chiefly) and **cracked Naphtha**.

The Neural Networks statistical analysis has shown consistent results for the studied dependent variables. This statistical analysis consists in utilizing all the data validated in the unit in the creation of mathematical models (Neural Networks) for each of the interest variables (**DPT**, conversion, **cracked Naphtha** yield, etc.) discriminating the effects of the catalyst used relative to the process remaining independent variables. Neural Networks were built to calculate the deviation (catalyst System with **DENALI** – Base catalyst System) for the chosen dependent variables. **Figure 9** details some results for variable deviations calculations studied with the aid of the Neural Networks technique.

For the test under operating conditions designed for a direct comparison between the new catalyst system and base catalyst period, all the conditions set forth for the test were met by the refinery team, exception made to the feed quality (RCR and density) which, in this case, could have provided some advantage to the DENALI catalyst system. In spite of the difference in feed quality, the comparison results obtained during the test were coherent with other comparisons made with commercial data in terms of yield profiles and higher clearance in the unit energy balance.

Based on the data tests, a simulation with the FCC SimTM software was also run for calibration and economic optimization. The simulation determined the highest profitability level by rising the virgin catalyst make-up, exploring the thermal clearance and advancing in bottoms conversion for increased cracked naphtha and LPG, exacerbating the LCO yield reduction.

Besides the methodologies described above for obtaining performance comparison between the catalyst systems studied, equilibrium catalyst samples of the base catalyst and the new catalyst system with DENALI catalyst were collected for lab scale performance tests at the PETROBRAS CENPES R&D Center. The properties of the analyzed e-cats can be observed as delta's relative to the base case in Table 2. The main advantages of the DENALI catalyst e-cat are the higher MAT activity, higher accessibility (AAI) and lower sodium content. As regards the contamination with nickel and vanadium metals, the DENALI e-cat exhibited slightly lower values, this not being considered relevant for the performance analysis.

In performance comparisons effected in ACE lab units the e-cat of the period of time with DENALI catalyst also showed advantages relative to the base case e-cat, viz. increased bottoms conversion directed to increased LPG yield, and mainly, cracked naphtha, with similar LCO yield. The results were generally similar to those obtained with the Clusters and Neural Networks analysis techniques and performance tests under conditions similar to that of the previous catalyst system.

Table 2 – Properties of the e-cats collected in the refinery.

PROPERTIES	OPAL K 2181 APRIL 06, 2021	DENALI K 5005 OCTOBER 05, 2021
MAT (% massa)	Base	+ 2,0
BET S.A. (m ² /g)	Base	+ 3,0
MiPV (mL/g)	Base	+ 0,003
MSA (m ² /g)	Base	+ 1,0
AAI	Base	+ 1,8
RE ₂ O ₃ (wt%)	Base	0,0
Na (wt%)	Base	- 0,09
Ni (ppm)	Base	-155 (ou - 4,4%)
V (ppm)	Base	-159 (ou - 11,1%)

Table 3 shows the comparison between the yield delta's for products projected before the refinery test and the delta's obtained with some of the applied performance analysis techniques.

Based on the obtained results it is reasonable to state that the catalyst obtained by the new DENALI technology exhibited the expected change in products yield profile for most of the analyses applied, the main advantage being the increased unit bottoms conversion for increased LPG and cracked naphtha yield and slight LCO yield reduction. As projected, the introduction of the DENALI catalyst, when compared under similar conditions with the previous catalyst system (test under similar conditions) aided in reducing the regenerator dense phase temperature, providing a thermal clearance useful for increased unit conversion, as could be observed from the Neural Networks results.

Taking into consideration all of the applied techniques, the neural networks analysis was considered the most reliable of the performance comparison because of the utilization of a huge unit data amount.

Table 3 – Yield Delta's on a mass basis for various techniques applied in the DENALI catalyst analysis at a PETROBRAS FCCU

DELTA'S	PROJECTION (DCR)	TEST UNDER SIMILAR	NEURAL NETWORKS	E-CATS ACE
Delta K, %rel.	-6,92%	-12,1%	4,7%	-19,1%
DPT, °C	-10,2	-11,8	1,0	-
Yields (%m/m)				
FG	-0,05	0,09	0,06	-0,14
Hydrogen	0,00	0,01	0,00	-0,06
LPG	1,12	0,60	0,27	0,60
Propene	0,44	0,55	0,03	0,23
Cracked Naphtha	0,79	1,64	1,63	1,70
LCO	-0,74	-0,60	-0,92	0,00
CLAO	-1,12	-1,41	-1,19	-2,10
K	0,00	-0,33	0,15	0,00
Conversion	1,86	2,01	2,11	2,10



The overall result of the new catalyst system with **DENALI** catalyst commercial test in a **PETROBRAS FCCU** was highly positive, since it showed profitability gain, chiefly because of reduction in bottoms product (**CLAO**) and increased **cracked naphtha** yield, besides improvement in octane naphtha. Such improvement in **cracked naphtha** quality is particularly relevant since it allows higher incorporation of direct distillation naphtha, of lower added value, to the gasoline pool while aiding the refinery in anticipating compliance with the new octane RON specification, launched on January 2022.

Besides the operating and profitability aspects, the environmental aspect of the **DENALI** catalyst was observed in a commercial unit, relative to particulate matter emission. During the test the particulate matter accumulation in the third stage cyclones, the amount of particulate matter (ashes) present in **CLAO**, the catalyst level in the

regenerator, and the catalyst granulometric distribution in the unit were monitored. After inspection during the test, it could be concluded that the **DENALI** catalyst did not cause any observable change in these variables and the new technology was also approved under the environmental aspect.

As relates to the applicability of the **DENALI** technology, the confirmation of the good results obtained in the commercial tests proved that the new catalyst has potential for application in other **PETROBRAS** cracking units, chiefly in 6 of them where they can benefit, at different degrees of relevance, from the **DENALI** catalyst better coke selectivity. The new **DENALI** catalysts family with a new matrix and ultra-stabilized zeolite exhibited excellent results in commercial scale in terms of coke selectivity and bottoms conversion, becoming the new benchmark for this application at **PETROBRAS**. Thus, this new catalyst solution has good potential to leverage the **FCCUs** profitability.



YOUR OPINION IS VERY IMPORTANT

[CLICK HERE](#)

Rate and comment the present publication by accessing our site.

About FCC S.A.

FCC S.A is a leading-edge technology company, with headquarters in Rio de Janeiro, comprising the Petrobras S.A. and Albemarle Corporation companies. Being the sole manufacturer of catalytic cracking catalysts and additives for petroleum refining in the South-American market, its consumer customers are the refineries of the Petrobras Systems, as well as the petroleum refineries of South-American countries.



FÁBRICA CARIOCA
DE CATALISADORES

For more information, contact the **FCC S.A.**
Technical Services team

Rua Nelson da Silva, 663 - Distrito Industrial de Santa Cruz
CEP: 23565-160 - Rio de Janeiro - RJ - Brasil
www.fccsa.com.br